



# The Nexus of Crop Water Productivity and Sources of Irrigation Water: the Case of Wheat Farms in Egypt and Sudan

---

Elrashid Abdallah Fageer and Enas Mohamed Abbas Saleh

EasyChair preprints are intended for rapid dissemination of research results and are integrated with the rest of EasyChair.

November 13, 2023

# **The nexus of crop water productivity and sources of irrigation water: the case of wheat farms in Egypt and Sudan**

**Elrashid A. Fageer<sup>1\*</sup> and Enas M. S. Abbas<sup>2</sup>**

<sup>1</sup> Agricultural Research Corporation - Sudan.

<sup>2</sup> Agricultural Research Centre - Egypt.

## **ABSTRACT**


This study aims to compare the impacts of irrigation from the Nile and underground water sources on water productivity of wheat for enhanced food security and efficient utilization of water resources in Egypt and Sudan. Endogenous switching regression was applied to data from a purposive random sample of 1,272 wheat growing farms in both countries to eliminate selection bias due to observable and non-observable factors.

Results show that only 23% and 3% of wheat farms are irrigated from underground water with an average water productivity of 0.899 and 0.137 kg per m<sup>3</sup> of wheat in Egypt and Sudan, respectively. The average water productivity is 0.899 kg/ m<sup>3</sup> and 0.137 kg/ m<sup>3</sup> in Egypt and Sudan, respectively. Irrigation from the Nile significantly increases water productivity by 0.039 kg/m<sup>3</sup> in Egypt while the gain is 0.072 kg/ m<sup>3</sup> for underground water in Sudan. Higher water productivity is significantly attributed to adoption of improved production technologies such as the recommended number and interval of irrigations and the use of recommended input levels in both countries. Membership in cooperatives and large schemes was found to be an important determinant that significantly increases irrigation from the Nile water in Egypt while adoption of irrigation technologies, wheat area percentage and adequacy of Nile water supply are significant determinants to use underground water in Sudan. The study recommends increased utilization of underground water and introduction of water saving techniques in Sudan and efficient planning to blend Nile and underground water for wheat self-sufficiency in Egypt.

**Keywords:** Water productivity, wheat, Egypt, Sudan, Endogenous switching regression

## 1. Introduction:

The water subsector is a key element in “water, energy and food (WEF)” nexus interventions and strengthening it implies better integration in the plans of agriculture and energy sectors with inter-dependent effects for enhanced food security (Bekele et al, 2012). Despite that agriculture plays an important role in the economies of the Nile Basin countries, yet, it has not realized the desired levels of food security for various reasons. The total irrigated area in this region is 4.3 million ha, out of which 35 million ha is found in Egypt, 1.8 million ha in Sudan and 0.3 million ha in Ethiopia (Water Watch, 2009). The demand for water in most upstream countries is expected to rise with drastic implications on poverty and food security ((Bekele et al, 2012, Wilson, 2007) which determine past and present access to water in the sub-basins (Molden et al., 2003) and incidence of poverty (Kristjanson et al., 2005). Egypt covers very arid regions situated between the Sahara and Arabian deserts (Ahmed, 2009). Water resources in Egypt are limited to the Nile River, limited rainfall and deep groundwater in the deserts and Sinai, and potential desalination of sea and brackish water. Egypt receives about 95% of its fresh water resources from outside its national borders (Abdeen and Gaafar, 2009). Egypt’s municipal, agricultural and industrial water requirements increase with time due to the increase in population and the improvement of living standards. In order to control water use in the agricultural sector, high water demanding crops such as rice and maize were excluded from “liberalization” the cropping pattern for rational use of water resources in the country.

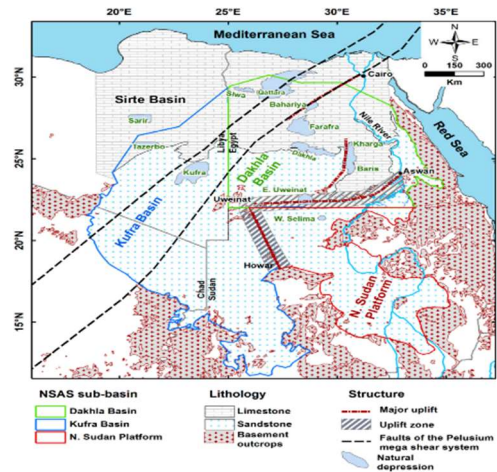

Water withdrawal from the Nile in the Sudan has increased substantially over the last decades (Muhammed et al, 2023). The highest magnitude of water withdrawal was observed during the last decade (2011–2020). The lack of significant canal and pump system expansion is a major driver of newly built farms being groundwater-dependent despite negative economic incentives (Lahymeyer, 2006) while Macalister et al. (2012) estimate that only 60,000 ha of Sudan’s irrigated area are supplied solely from groundwater out of a potential of 1.4 million ha. Much of this potential groundwater irrigation area exists within Northern State in desert and underlain by the Nubian Sandstone Aquifer. While applying the WEF nexus (Babiker et al (2019) showed that the slow improvement in agricultural productivity for Sudan is a consequence of inefficient use of available water and energy resources. The total water resources in Sudan amount to 103.3 billion cubic meters with surface water storage estimated at 21 billion cubic meters in 2011 and is expected to be 59.2 billion cubic meters in 2050 with irrigation water needs of 42.5 billion cubic meters (Sudan Policy and Strategy on Integrated Water Resources Management, 2007).

Climate change in Sudan will lead to a reduction in groundwater recharge, reduction in the main winter crop-growing season and increase in crop water requirements (Fragaszy and Closas, 2016). The average temperatures during the flood season and main wheat-growing season are expected to increase over one degree centigrade and up to four degrees (IFAD, 2013). Most of the regional groundwater recharge occurs during the flood peak and so any increase in evaporation will reduce groundwater infiltration (Niestle, 1993). Also, increased winter temperatures will reduce the already short wheat-growing season in the Sudan and increase heat stress, both of which have negative impacts on crop yields (Ageeb, 1994).

A useful indicator of the performance of irrigated farming in water-scarce areas is the crop water productivity (WP) which is defined as the ratio of benefits produced, such as yield, to the amount of water required to produce those benefits (Molden et al., 2010). This indicator can further help with planning water allocation among different uses while ensuring water availability for agro-ecosystem functioning (Loeve et al., 2004; Molden et al., 2007). Water productivity across all Nile Basin countries is low except for Egypt (Bekele et al, 2012) where high productivity zone includes

the delta and irrigated areas along the Nile River in the northern part of the basin. This zone is characterized by intensive irrigation, high yields and high-value crops. These characteristics collaboratively contribute to the high level of the WP attained and are in fact correlated where access to irrigation results in higher yields and income. WP is relatively low in Sudan due high reliance of rain-fed farming. A good example that shows how irrigation can bring in improvements is the Gezira scheme where irrigation has resulted in significantly higher WP in the scheme compared to its surrounding rain-fed areas (Yasir et al 2011).

Wheat is taken as a major food security crop to investigate the nexus linkages between water and food in Egypt and Sudan comparing WP from Nile and underground sources in both countries. Wheat is the most important cereal crop in Egypt. However, Egypt is not able to produce enough to feed its growing population. According to (MALR, 2009), there are considerable achievements by the government in increasing productivity but, given the limited scope for expansion of the arable area in the country, this target can be achieved using two complementary approaches namely, raising productivity through agricultural intensification using recommended technology packages involving high yielding varieties and associated agronomic practices and reducing food loss and waste along the entire value chains of wheat. One major recommendation to increase WP is to adopt a recommended frequency of 3-4 irrigations and the amount of irrigation water in farmer fields not exceeding 5500 m<sup>3</sup>/ha per season. This leads to a reduction in the amount of irrigation water of between 25-30%. Similarly, wheat is an important crop in the Sudan contributing largely to its international trade. However, as a result of decreased production and increased demand, Sudan has turned to be net wheat importer with low self-sufficiency ratio that ranged between 20%-39% during 2001-2011 Most recently, the self-sufficiency rate decreased drastically reaching to a minimum of 10% in 2021.

## **2. Objectives**

This study aims to analyze the interdependence of food security to water availability, economics of water use and food security in Egypt and Sudan. More specifically, our objective is to assess potential linkages and relationship between water productivity and source of irrigation water in

both countries within the “water, food and energy” nexus framework. Our hypothesis is that managing transboundary resources of irrigation water will lead to improved water productivity and food security in a sustainable and rational manner. The estimation of potential water productivity for wheat using irrigation water from the Nile or underground sources will help planning what production in both countries under various levels of water stress arising from factors beyond their control. Hence, enhanced food security can be realized with higher self-sufficiency rates of wheat in both countries.

### **3. Methodology**

#### **3.1. Model used**

This study uses endogenous switching regression which is an econometric model that specifies a decision process and the regression models associated with each decision option in which observations are allocated depending on the value of a latent decision variable relative to a threshold value based on the expected utility.

The endogenous switching regression has been used in many studies recently for its robustness compared to other models. Dickens and Lang (1985), Arunachalam and Logan (2006), Kopczuk and Lupton (2007), Lee and Porter (1984), Conway, and Ferrier (1995), or Caudill (2003). These studies have established the feasibility of maximum likelihood and other estimation techniques in this situation. In order to estimate the treatment effects of binary variable on count dependent variable, Terza (1998, 2008, 2009) proposed nonlinear models that take into account the nonlinear nature of dependent variable. Terza (1998) considers a model where the binary treatment variable shifts the intercept inside the conditional mean function and provides estimating equations that can be implemented by using the observable variables. Also in later works, Terza (2008, 2009) extends the earlier model by incorporating the counterfactual framework where the treatment status puts the individual in a different regime. The ESR is widely used in applied studies. Kyriazidou (1997) proposed a two-step estimation method which provides consistent and asymptotically normal estimators for estimating a panel data sample selection model with latent individual specific effects in both the selection and regression equations. In the first step, the unknown coefficients of the selection equation are consistently

estimated and in the second stage, the estimates are plugged into the regression equation of interest. In her methodology, the sample selection effect and the unknown coefficients are differenced out from the equation of interest. Barachina and Engracia (1999) likewise introduced a two-step estimation method for a panel data sample selection model with individual specific effects in both the selection and regression equations. The endogenous switching regression model may also be estimated by the full information maximum likelihood method FIML which yield efficient estimators of the model. Terza (1998) used FIML to estimate an endogenous switching regression model with count data as well.

Although working with endogenous switching regression is reasonably cited in the literature, for example the work by Gronau (1974), Lewis (1974) and Heckman (1974), Lee and Trost (1978) and Charlier, Melenberg and van Soest (2001), Willis and Rosen (1979). Mundaca (2001) and Gowrisankaran and Town (1999), but its shortcomings with small samples are well established which yield biased estimators of the regression coefficients. Nawata and McAleer (2001) demonstrated that the finite sample problem with the t-test is alarming and more severe for binary choice and sample selection models.

The endogenous switching model can be written in the reduced form as follows (Mare and Winship, 1988).

$$Z_i^* = \sum_k \pi_k X_{ki} + \varepsilon_{1i} \quad (1)$$

$$Y_{0i} = \sum_k \beta_{0k} X_{ki} + \varepsilon_{2i} \quad (2)$$

$$Y_{1i} = \sum_k \beta_{1k} X_{ki} + \varepsilon_{3i} \quad (3)$$

Where,

$i$  denotes the household id ( $i=1, \dots, n$ ).

$Z_i$  is a dichotomous variable equals 1 for irrigation from the Nile and 0 from underground water with a latent tendency  $Z_i^*$  that indexes the likelihood to select either options.

$Y_i$  is the outcome variable that takes two values  $Y_0$  and  $Y_1$  for Irrigation from the Nile and underground water pertaining to the same individual,  $i$ .

$X_{ki}$  is the on the  $k$ th measured independent variable ( $k = 1, \dots, k$ ).

$\beta_{0k}$  and  $\beta_{1k}$  are parameters to be estimated.

$\varepsilon_{2i}$  and  $\varepsilon_{3i}$  denote stochastic disturbances.

The interest of this model centers on the expected difference between the two outcomes namely  $E(Y_1) - E(Y_0)$

Although two outcomes are hypothesized for each individual, but only one outcome is observed and the other outcome is a counterfactual. The objective of studying treatment effects call for the knowledge of counterfactual outcomes for both participants and non –participants. Comparison of the coefficients across equations 3 and 4 yields the treatment effects conditional on the covariates (Mare and Winship, 1988).

Sample-selection and disequilibrium models belong to the general class of switching models with the switch determined endogenously (Maddala and Nelson, 1975). A decision whether or not to adopt a new technology may be based on productivity gains and cost of adopting the new technology.

### 3.2. Sampling, method of data collection and analysis:

A purposive random sample of 1272 wheat farmers from Egypt and Sudan were interviewed during 2016. The total sample size and sub-samples from each source of irrigation is shown in Table 1. Irrigation from the Nile is dominant, comprising 77% and 92% of water supply sources for wheat growing households in Egypt and Sudan, respectively. Underground water is drawn from shallow or deep wells depending on scheme location while irrigation from the Nile is mostly organized through irrigation schemes and agricultural cooperatives in both countries. The survey was carried out during wheat growing season of 2016 at the same time in Egypt and Sudan, data was analyzed using STATA package of statistical analysis to draw results.

Table 1: Sample distribution of wheat farmers by source of irrigation in Egypt and Sudan. 2016.

Country	Source of irrigation water		
	Nile	Underground	Total
Egypt	532	159	691
Sudan	526	55	581
Total	1058	214	1272

Source: Field survey, 2016.



#### 4. Results and discussion

Some descriptive statistics of major wheat farming household characteristics is presented in Tables 2 and 3. The average farm area was higher in Sudan compared to Egypt with 3.5 and 1.15 ha for both countries, respectively. Similarly, the average area cultivated with wheat was 2.80 ha in Sudan compared to 0.88 ha in Egypt where wheat life cycle is longer compared to Sudan (153 days on average versus 115 days in Sudan) as winter season extends in Egypt beyond that in Sudan offering more time for non-stressed vegetative growth required by the crop.

Table 2: Farm and water use characteristics of wheat producing farms in Egypt and Sudan, 2016

Source of irrigation water	Average farm area in 2016 (ha)		Average wheat area in 2016 (ha)		Average wheat life cycle (days)	
	Egypt	Sudan	Egypt	Sudan	Egypt	Sudan
The Nile	1.20	3.0	1.10	2.20	155	120
Underground <sup>***</sup>	1.10	4.0	0.66	3.40	150	110
Average	1.15	3.50	0.88	2.80	153	115

Source: Field survey, 2016.

As shown in Table 2, more land is allocated for wheat from underground water compared to irrigation from the Nile in Sudan (3.4 ha and 2.2 ha, respectively) unlike the situation in Egypt where irrigation from the Nile is more dominant (1.1 ha versus 0.66 ha, respectively). Wheat crop is irrigated more frequently in Sudan (Table 2 ) leading to higher number of irrigations per season (6 irrigations in Sudan and 4 in Egypt). As a result, and also due to the higher amount of applied water per unit area, the total quantity of water applied per season is significantly higher in Sudan (5667 m<sup>3</sup>/ha) compared to Egypt (1156 m<sup>3</sup>/ha). More water is pumped from underground sources in Sudan compared to irrigation from the Nile (6664 m<sup>3</sup>/ha and 4760 m<sup>3</sup>/ha from both sources, respectively). This is unlike the situation in Egypt where more water is pumped from the Nile (1178 m<sup>3</sup>/ha) compared to underground water (1133 m<sup>3</sup>/ha). Irrigation intervals follow similar patterns to the number of irrigations in both countries, where irrigation cycle using Nile water is longer than that of underground water, the situation for Sudan is different with more irrigation cycle occurring with underground water compared to pumping from the Nile.

Table 3: Description of irrigation practices of wheat producing farms in Egypt and Sudan, 2016

Source of irrigation water	number of wheat irrigations (Av.)		Water quantity (m <sup>3</sup> /ha)		Irrigation interval (days)	
	Egypt	Sudan	Egypt	Sudan	Egypt	Sudan
The Nile	4	5	1178	4760	22	13
Underground	4	7	1133	6664	21	14
Average	4	6	1156	5667	18	14

Source: Field survey, 2016.

The results of endogenous switching regression are presented in Tables 4 and 5 and predicted average water productivities and mean comparisons in Tables 6 and 7. There is a significant influence of farmer's membership in agricultural cooperatives on the decision to use Nile water to irrigate wheat in Egypt, probably due to their well-coordinated efforts and some historical rights and experience of the cooperatives to utilize Nile water. This influence is insignificant for Sudan, however. All other tested factors were not significant determinants of the decision to irrigate from the Nile in Egypt, whereas time taken to complete one irrigation cycle, and farmer's age significantly increased the likelihood to use Nile water, while commitment to the recommended number of irrigations and shortage laborers of irrigation at the field level are associated with higher likelihood to use underground water in Sudan.

Table 4: The estimated endogenous switching regression of wheat producing farms in Sudan, 2016

	Coefficient	SE ±	Z	P> z	[95% Conf. Interval]	
<b>Water Productivity 0</b>						
Age category (0=young farmers)	-0.13449	0.045073	-2.98	0.003	-0.22284	-0.04615
Apply irrigation recommendation	-0.02268	0.02641	-0.86	0.391	-0.07444	0.029085
Wheat/farm area (%)	-0.11346	0.037707	-3.01	0.003	-0.18736	-0.03955
Attend water managt. t field days	0.143505	0.027636	5.19	0	0.08934	0.19767
<b>Participation in technology transfer</b>						
Experience (years)	-0.00723	0.002423	-2.98	0.003	-0.01198	-0.00248
<b>Use recommended irrigation frequency</b>						
Constant	0.407446	0.074636	5.46	0	0.261162	0.553731
<b>Water Productivity 1</b>						
Age category	0.014331	0.010605	1.35	0.177	-0.00645	0.035116
Apply irrigation recommendation	0.016637	0.01375	1.21	0.226	-0.01031	0.043586
Wheat/farm area (%)	0.060331	0.020002	3.02	0.003	0.021129	0.099534
Area under irrigation (ha)	-0.00208	0.0029	-0.72	0.473	-0.00776	0.003603
Attend water Managt. field days	-0.03678	0.011721	-3.14	0.002	-0.05976	-0.01381
<b>Participation in technology transfer</b>						
Experience (years)	-0.00028	0.000324	-0.86	0.392	-0.00091	0.000357
Use recommended irrigations	0.000189	0.014561	0.01	0.99	-0.02835	0.028729
Constant	0.085373	0.022831	3.74	0	0.040624	0.130121
<b>Cost of irrigation (SDG/ha)</b>						
Cooperative membership	0.632832	1.18	0.238	-0.49361	1.987045	
Age (years)	0.024559	0.014482	1.7	0.09	-0.00383	0.052943
Number of irrigation workers	-0.76364	0.375381	-2.03	0.042	-1.49937	-0.0279
Wheat/farm area (%)	1.105058	0.273084	4.05	0	0.569823	1.640293
Time of one irrigation (days)	-0.0612	0.016715	-3.66	0	-0.09396	-0.02844
Total cost of irrigation (SDG)	-0.00065	0.000797	-0.82	0.413	-0.00221	0.000909
Days per one irrigation	0.311939	0.093706	3.33	0.001	0.128278	0.495599
Use of irrigation frequency	0.692504	0.436555	1.59	0.113	-0.16313	1.548137
Age category	1.143155	0.315876	3.62	0	0.524051	1.76226
Use recommended irrigation	-1.72391	0.888234	-1.94	0.052	-3.46482	0.016993
Constant	4.214641	3.346182	1.26	0.208	-2.34376	10.77304
/lns0	-3.00827	0.167071	-18.01	0	-3.33572	-2.68082
/lns1	-2.36854	0.029527	-80.22	0	-2.42641	-2.31067
/r0	-7.5827					
/r1	7.713414					
sigma0		0.049377	0.035589	0.068507		
sigma1		0.093617	0.088353	0.099195		

Number of orbs = 586, Wald chi<sup>2</sup> (7) = 95.88, Log likelihood = 566.04514 and Prob > chi<sup>2</sup> = 0.0000

Source: Field survey, 2016.

Once decision has been taken on the source of irrigation higher water productivity is significantly realized in farms with higher percentage of wheat within the crop mix, regular attendance of technology transfer and water management sessions in Sudan while relatively young farmers and farmers who apply water less than the recommended attain higher water productivity levels in Egypt.

Table 5: The estimated endogenous switching regression of wheat producing farms in Egypt, 2016

	Std Err.	z	P> z	[95% Conf. Interval]	
<b>Water Productivity 0</b>					
Water quantity (m <sup>3</sup> )	-0.00055	2.42E-05	-22.73	0	-0.0006 -0.0005
Age (years)	-0.0007	0.000518	-1.35	0.177	-0.00171 0.000316
Wheat area (ha)	-0.00702	0.005874	-1.19	0.232	-0.01853 0.004496
Number of total irrigations	0.073869	0.016517	4.47	0	0.041496 0.106241
Constant	1.841038	0.093841	19.62		1.657112 2.024963
<b>Water Productivity 1</b>					
Water quantity (m <sup>3</sup> )	-0.00052	2.33E-05	-22.39	0	-0.00057 -0.00048
Age (years)	-0.00088	0.000468	-1.88	0.06	-0.0018 3.71E-05
Wheat area (ha)	0.001564	0.000947	1.65	0.099	-0.00029 0.003421
Number of total irrigations	0.102288	0.011484	8.91	0	0.079781 0.124796
Constant	1.670783	0.062487	26.74	0	1.548312 1.793255
<b>Selection equation</b>					
Total area (ha)	0.01636	0.011621	1.41	0.159	-0.00642 0.039137
Number of total irrigations	-0.11809	0.125536	-0.94	0.347	-0.36413 0.127957
Cooperative membership	-0.8938	0.340595	-2.62	0.009	-1.56136 -0.22625
Age (years)	0.007706	0.005029	1.53	0.125	-0.00215 0.017563
Constant	1.686465	0.763173	2.21	0.027	0.190674 3.182257
/lns0	-2.59171	0.056072	-46.22	0	-2.70161 -2.48181
/lns1	-2.23564	0.035939	-62.21	0	-2.30608 -2.1652
/r0	-0.13444				
/r1	-0.25193	0.163142	-1.54	0.123	-0.57168 0.067821
sigma0	0.074892	0.004199	0.067097	0.083592	
sigma1	0.106924	0.003843	0.099651	0.114727	
rho0	-0.13364		-1	1	
rho1	-0.24673	0.153211	-0.5166	0.067717	

Number of obs = 691 Wald chi<sup>2</sup>(4) = 563.70 Log likelihood = 263.902 Prob > chi<sup>2</sup> = 0.0000

LR test of indep. eqns. : chi<sup>2</sup>(2) = -0.02 Prob > chi<sup>2</sup> = 1.0000

Source: Field survey, 2016.

The change in water productivity is summarized in Tables 6 and 7. The conventional t test for mean differences shows that water productivity is higher for Nile schemes in Egypt and for underground

schemes in Sudan. The reason is that excessive water is used with Nile irrigation in Sudan compared with underground water pumping and this result confirms the descriptive statistics presented in Table 1.

Table 6: Mean comparison of water productivity by source of irrigation in Egypt, 2016

Source	Count	Mean	Std. Err	Std.Dev	[95% Conf. Interval	
Nile	532	0.919323	0.004513	0.104097	0.910457	0.928189
Underground	532	0.879579	0.004997	0.115253	0.869763	0.889395
Combined	1064	0.899451	0.00342	0.111551	0.892741	0.906161
Difference		0.0397438***	.0067333		.0265317	.0529558

Source: Field survey, 2016.

An average of 0.039 kg/m<sup>3</sup> can be added in wheat water productivity when Nile water is used instead of underground water under the current conditions in Egypt. On the contrary, 0.0486 kg/m<sup>3</sup> can be added in Sudan when using ground water instead of the Nile water. In general, the average water productivity of wheat is higher in Egypt compared to Sudan as yield is significantly higher and water applied is lower.

Table 7: Mean comparison of water productivity by source of irrigation in Egypt, 2016.

Source	Count	Mean	Std.Err	Std.Dev	[95% Conf. Interval	
Nile	572	0.161554	0.001407	0.033645	0.158791	0.164317
Underground	572	0.11293	0.005457	0.130504	0.102213	0.123648
combined	1144	0.137242	0.002907	0.098312	0.131539	0.142945
Difference		0.048624***	0.0056351		0.0375676	0.05968

Source: Field survey, 2016.

Based on the estimated water productivity levels, Table 8 presents the total amount of water required to produce 10 m ton of wheat in Egypt and 2 m ton of wheat in Sudan disaggregated by sources of irrigation water. AN amount of 397 million cubic meters of water can be saved in Egypt when using Nile water alone while 97,000 cubic meters can be saves in Sudan using underground water as a source of irrigation water. The reason of this disparity is that water use efficiency is higher in Egypt compared to Sudan.

Table 8: Estimated mounts of water to realize wheat self-sufficiency in Egypt and Sudan.

Sudan	Source	WP (kg/ m <sup>3</sup> )	WR (m <sup>3</sup> /ton)	Water for wheat target
Egypt	Nile	0.919323	919	9,193,230
	Underground	0.879579	880	8,795,790
	Average	0.899451	899	8,994,510
	Difference	0.03974	39	397,440
Sudan	Nile	0.161554	162	323,108
	Underground	0.11293	113	225,860
	Average	0.137242	137	274,484
	Difference	0.04862	49	97,248

Source: Calculated based on field survey, 2016.

## 5. Conclusion and recommendations

This study aims to analyze the interdependence of food security to water availability, economics of water use and food. This study aims to compare the impacts of irrigation from the Nile and underground water sources on water productivity of wheat for enhanced food security and efficient utilization of water resources in Egypt and Sudan. Endogenous switching regression was applied to data from a purposive random sample of 1,272 wheat growing farms in both countries to eliminate selection bias due to observable and non-observable factors.

Results show that only 23% and 3% of wheat farms are irrigated from underground water with an average water productivity of 0.899 and 0.137 kg per m<sup>3</sup> of wheat in Egypt and Sudan, respectively. The average water productivity is 0.899 kg/ m<sup>3</sup> and 0.137 kg/ m<sup>3</sup> in Egypt and Sudan, respectively. Irrigation from the Nile significantly increases water productivity by 0.039 kg/m<sup>3</sup> in Egypt while the gain is 0.072 kg/ m<sup>3</sup> for underground water in Sudan. Higher water productivity is significantly attributed to adoption of improved production technologies such as the recommended number and interval of irrigations and the use of recommended input levels in both countries. Membership in cooperatives and large schemes was found to be an important determinant that significantly increases irrigation from the Nile water in Egypt while adoption of irrigation technologies, wheat area percentage and adequacy of Nile water supply are significant determinants to use underground water in Sudan. The study recommends increased utilization of underground water

and introduction of water saving techniques in Sudan and efficient planning to blend Nile and underground water for wheat self-sufficiency in Egypt.

## References

1. Abdeen A.E and Gaafar, I. (2009): Rational water use in Egypt <http://om.ciheam.org/article.php>
2. Ageeb, O. 1994. Agronomic aspects of wheat production in Sudan. In Proceedings of the international conferences on wheat in hot, dry, irrigated environments, pp. 67-74. Wad Medani, Sudan, 1-4 February 1994.
3. Ahmed Aziz Abd El Moniem (2009) Overview of water resources and requirements in Egypt; the factors controlling its management and development. *Journal of Environmental Studies*, Volume 2:85-97. 2009
4. Babiker B.; Ali Salih; Khalid Siddig; Claudia Ringler: Nexus Assessment: Synergies of the Water (2019), Energy and Food Sectors in Sudan. Published by Nexus Regional Dialogue Programme (NRD)
5. Arunachalam, R., & Logan, T. D. (2006). Heterogeneity of dowry motives (Working Paper 12630). *National Bureau of Economic Research*- Cambridge Trevon D. Logan JEL No. C5,D1,J12
6. Barachina, R., and Engracia, M. (1999). A New Estimator for Panel Data Sample Selection Models, <https://annals.ensae.fr/wpcontent/uploads/pdf/n5556/vol5556-07.pdf>
7. Caudill, S. B. (2003). Estimating a mixture of stochastic frontier regression models via the EM algorithm: A multiproduct cost function application. *Empirical Economics*, 28(3):581-598.
8. Dickens, W. T., & Lang, K. (1985). A test of dual labor market theory. *The American Economic Review*, 75 (4): 792–805.
9. FAO (Food and Agriculture Organization of the United Nations) (2005) FAO Water Report No. 29, FAO, Rome, Italy.
10. Fragaszy, S. and Closas, A. 2016. Cultivating the desert: Irrigation expansion and groundwater abstraction in Northern State, Sudan. *Water Alternatives* 9(1): 139-161
11. Gowrisankaran, G., and Town, R. (1999) "Estimating the Quality of Care in Hospitals Using Instrumental Variables, *Journal of Health Economics*, 18:747-67.

12. Gronau, R. (1974) Wage Comparisons: A Selectivity Bias,” and Lewis, H., “Comments on Selectivity Biases in Wage Comparisons, *Journal of Political Economy*, 82: 1119-1155.
13. IFAD (International Fund for Agricultural Development). 2013. Sudan environmental and climate change assessment. Prepared for IFAD’s Country Strategic Opportunities Programme 2013-2017. New York City: IFAD
14. IRCCWS (1977) The Water Resources of Sudan, a report of the Sudan national preparatory committee for the United Nations Water Conference (Argentina). 1977. International Reference Centre for Community Water Supply.
15. Kopczuk, W., & Lupton, J. P. (2007). To leave or not to leave: The distribution of bequest motives. *The Review of Economic Studies*, 74 (1), 207-235.
- Kyriazidou, E. (1997) Estimation of a Panel Data Sample Selection Model,” *Econometrica* 651335-1364.
16. Lahmeyer International. 2006. Feasibility study for the Merowe Irrigation Project Final Feasibility Report. Conducted on Behalf of the Dam Implementation Unit of the Ministry of Water Resources and Electricity, Sudan. Bad Vilbel, Germany: Lahmeyer International
17. Lee, L.-F., and Porter, R. H. (1984). Switching regression models with imperfect sample separation information—With an application on cartel stability. *Econometrica*, 52 (2), 391-418
18. Loeve, R., Dong, B., Molden, D., Li, Y. H., Chen, C. D. and Wang, J. Z. (2004) Issues of scale in water productivity in the Zhanghe irrigation system: implications for irrigation in the basin context, *Paddy and Water Environment*, 2, 227–236
19. MacAlister, C.; Pavelic, P.; Tindimugaya, C.; Ayenew, T.; Elhassan Ibrahim, M. and Abdel Meguid, M. (2012). Overview of groundwater in the Nile River Basin., *The Nile River Basin: Water, agriculture, governance and livelihoods*, pp. 186-211. London: Earthscan, an imprint of Routledge.
20. Maddala, G., and Nelson, F. (1975) “Specification Errors in Limited Dependent Variable Models,” Working Paper 96, *National Bureau of Economic Research*, Cambridge.
21. Mnaifred H.& Paul J. Brinkmann (1989) A groundwater model of the Nubian aquifer system, *Hydrological Sciences Journal*, 34:4, 425-447, DOI: 10.1080/02626668909491350  
<https://doi.org/10.1080/02626668909491350>



22. Mare, R.B., and Winship, C. (1988). Endogenous switching regression models for the causes and effects of discrete variables. In J.S. Long (ed.) Common problems/proper solutions: avoiding errors in quantitative research (pp. 132-160). Newbury Park, CA: Sage.
23. Muhammad Khalifa \* , Natalie E. Woods, Elfatih A.B. Eltahir (2023) Estimates of Sudan's historical water withdrawals from the Nile [www.elsevier.com/locate/jhydrol624/129858](http://www.elsevier.com/locate/jhydrol624/129858)
24. Molden, D., Murray-Rust, H., Sakthivadivel, R. and Makin, I. (2003) A water-productivity framework for understanding and action, in Water Productivity in Agriculture: Limits and Opportunities for Improvements, W. Kijne, R. Barker and D. Molden (eds), CAB International, Wallingford, UK
25. Molden, D., Oweis, T., Steduto, P., Bindraban, P., Hanjra, M. and Kijne, J. (2010) Improving agricultural water productivity: between optimism and caution, *Agricultural Water Management*, 97, 528–535
26. Molden, David, Seleshi Bekeli Awulachew, Karen Conniff, Lisa-Maria Rebelo, Yasir Mohamed, Don Peden, James Kinyangi, Paulo van Breugel, Aditi Mukherji, Ana Cascão, An Notenbaert, Solomon Seyoum Demise, Mohammed Abdel Meguid, Gamal el Naggar (2011) Nile Basin Focal Project, Synthesis Report, Project Number 59, Challenge Program on Water and Food and International Water Management Institute, Colombo, Sri Lanka.
- Nawata, K., and McAleer, M. (2001) "Size Characteristics of Tests for Sample Selection Bias: A Monte Carlo Comparison and Empirical Example," *Econometric Reviews*, 31 20, 105-112.
- 27
- 28 Qureshi, A. S., Oweis, T., Karimi, P. and Porehemmat, J. (2010) Water productivity of irrigated wheat and maize in the Karkheh River Basin of Iran, *Irrigation and Drainage*, 59, 264–276.
- 29 Seleshi Bekele Awulachew, Vladimir Smakhtin, David Molden and Don Peden (2012): The Nile River basin : water, agriculture, governance and livelihoods / edited by Seleshi Bekele Awulachew .
- 30 Niestle, A. 1993. Hydrologic drought risk modelling for agricultural areas. In Thorweihe, U. and Schandalmeier, H. (Eds), *Geoscientific research in Northeast Africa: International Conference extended abstracts*, pp. 699-704. Rotterdam: A.A. Balkema
- 31 Terza J. (1998). Estimating Count Models with Endogenous Switching: Sample Selection and Endogenous Treatment Effects. *Journal of Econometrics* 84: 129-154.
- 32 Terza J. (2009). Parametric nonlinear regression with endogenous switching. *Econometric Reviews* 28(6):555-580.

- 33 Terza J, Bradford D, Dismuke C. (2008). The Use of Linear Instrumental Variables in Health Services Research and Health Economics: A Cautionary Note. *Health Services Research* 43(3)
- 34 WaterWatch. (2009) The Nile Basin: Irrigation Water Management, poster, [www.waterwatch.nl/publications/posters/nile-basin-irrigation-water-management.html](http://www.waterwatch.nl/publications/posters/nile-basin-irrigation-water-management.html)
- 35 Willis, R., and Rosen, S. (1979) "Education and Selection," *Journal of Political Economy*, 87, S7-S36.
- 36 Wilson, R. T. (2007) Perceptions, Practices, principles and policies in the provision of livestock water in Africa, *Agricultural Water Management*, 90, 1–12.
- 37 Yasir, M., Thirumarudchelvan, T., Mamad, N., Mul, M. and van Der Zaag, P. (2011) Performance assessment of large irrigation systems using satellite data: the case of the Gezira scheme, Sudan, in ICID, 21st Congress on Irrigation and Drainage: Water Productivity towards Food Security, Tehran, Iran, 19–23 October 2011, ICID, New Delhi, India, ICID Transactions, no. 30-A, 105–122.